

EURO CHARGER II VHO

STANDARD DUAL SYSTEM BATTERY CHARGER FOR EXPORT



MODEL # 091-143-12

The Euro Charger II VHO is a fully automatic battery charger designed to meet CE requirements. Ruggedly constructed with a very high dual output, it float charges the battery and may be installed on the vehicle. Extremely precise voltage control maintains the charger output constant with variations in load or line voltage input. Active current limiting, limits the output current so as not to exceed its rated value when charging deeply discharged batteries or if the vehicle is started while charging.

SPECIFICATIONS:

Input: 120 / 230 Vac, 50/60 Hz, 10 / 5 Amps Max

Input Fuse: 12 / 8 Amps, Fast Acting

Output: 12 Vdc, 40 Amps

Output Fuse (Recommended): 80 Amps

Charge Indicator: 0-50 Amps

Weight: 22 lbs

Warranty: 3 Years



ENERGIZED AND READY, WHEN SECONDS COUNT

40 AMPS FOR CHARGING VEHICLE BATTERIES

VERY HIGH OUTPUT, FASTER BATTERY RECHARGE

INPUT VOLTAGE SELECTABLE, 115 or 230 VOLTS AC

DESIGNED TO MEET CE REQUIREMENTS

OPTIONAL REMOTE DISPLAYS

3 YEAR WARRANTY

OPTIONAL INDICATORS

BAR GRAPH DISPLAY



Model 091-11-127-12


10 Element, Weatherproof Dual Bar Graph battery condition display.

LOW COST LED INDICATOR



Model 091-90-012-12

LED Indicator shows when the charger is "ON" and when it is "CHARGING".

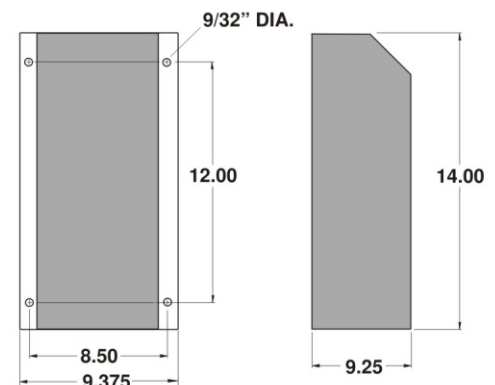

091-143-12 Outline Drawing