

INSTALLATION INSTRUCTIONS


Model 091-18-098 DYNAMIC DISCONNECT

The Model 091-18-098 Dynamic Disconnect is a coupling device wired between an Auto Eject and the vehicle and serves to only connect the A.C. power after the plug has been inserted into the Auto Eject. Upon vehicle startup the Dynamic Disconnect opens the load circuit before ejecting the plug. By providing the time delays on both application and removal of power, no arcing can occur at the connector.

Note:

**A.C. power must be present at the shore line connector
in order to operate the Dynamic Disconnect.**

Installation is simple, mount the Dynamic Disconnect at some convenient location, protected from the weather. Wire in accordance with the diagram below.

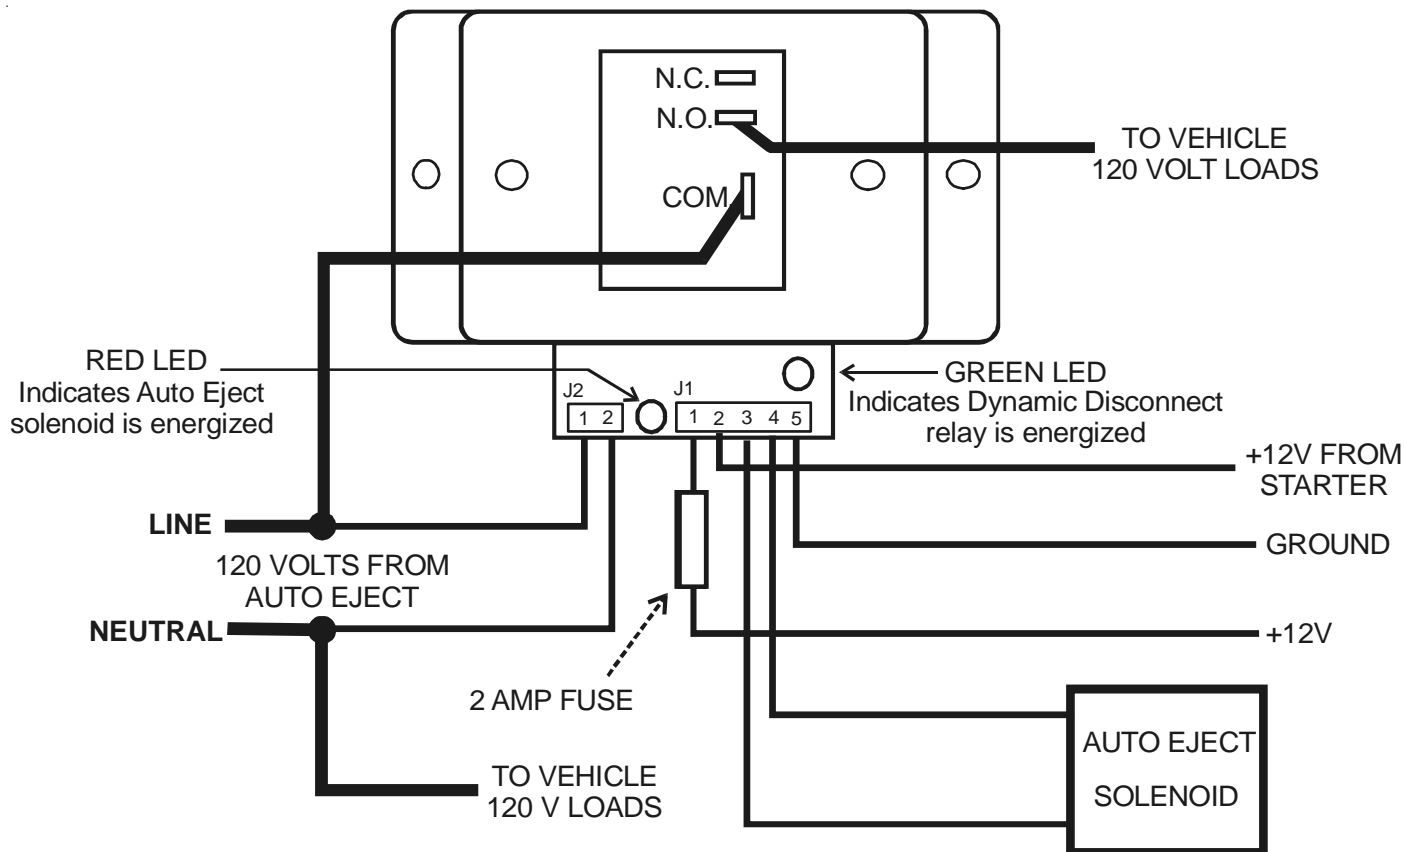

SINCE 1967, DESIGNERS OF INNOVATIVE PRODUCTS

KUSSMAUL ELECTRONICS COMPANY, INC.

170 CHERRY AVENUE, WEST SAYVILLE, NEW YORK, 11796-1221 USA

TEL. In NY: 631 567-0314

TOLL FREE: 800 346-0857

FAX: 631 567-5826